



ISO 2768
Клас допуск от 0.5 до 3 от 3 до 6 от 6 до 30 от 30 до 120 от 120 до 400 от 400 до 1000 от 1000 до 2000
f (фино) ±0.05 ±0.05 ±0.1 ±0.15 ±0.2 ±0.3 ±0.5 ±0.8 ±1.2
m (средно) ±0.1 ±0.1 ±0.2 ±0.3 ±0.5 ±0.8 ±1.2

D

C

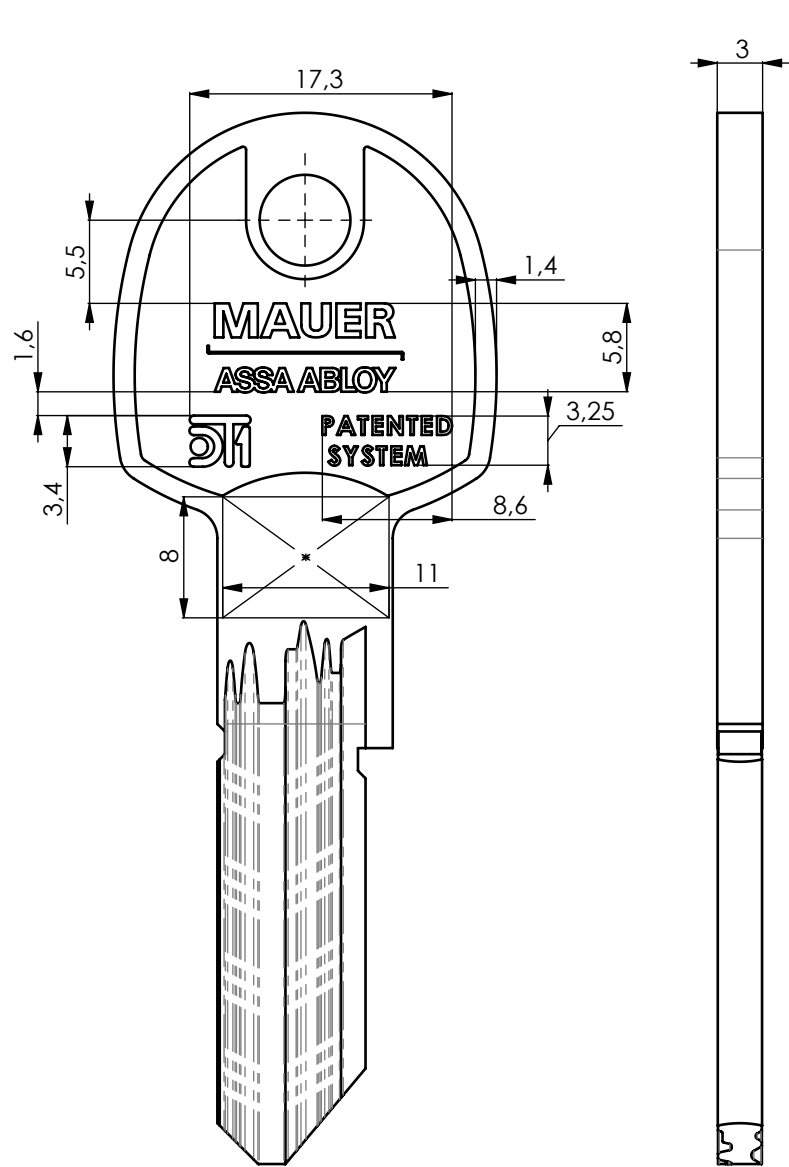


Щамповане с височина 0.1 ... 0.15 мм
Stamping with height 0.1 ... 0.15 mm

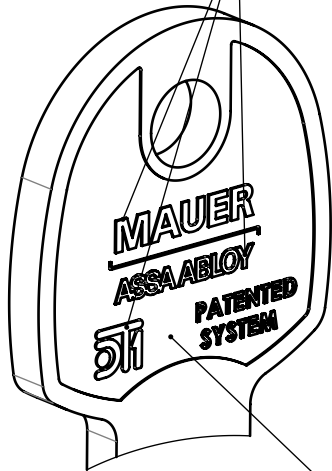




Дълбочина на
щамповане
0.1 ... 0.15мм
Depth of stamping
0.1 ... 0.15mm

D

C


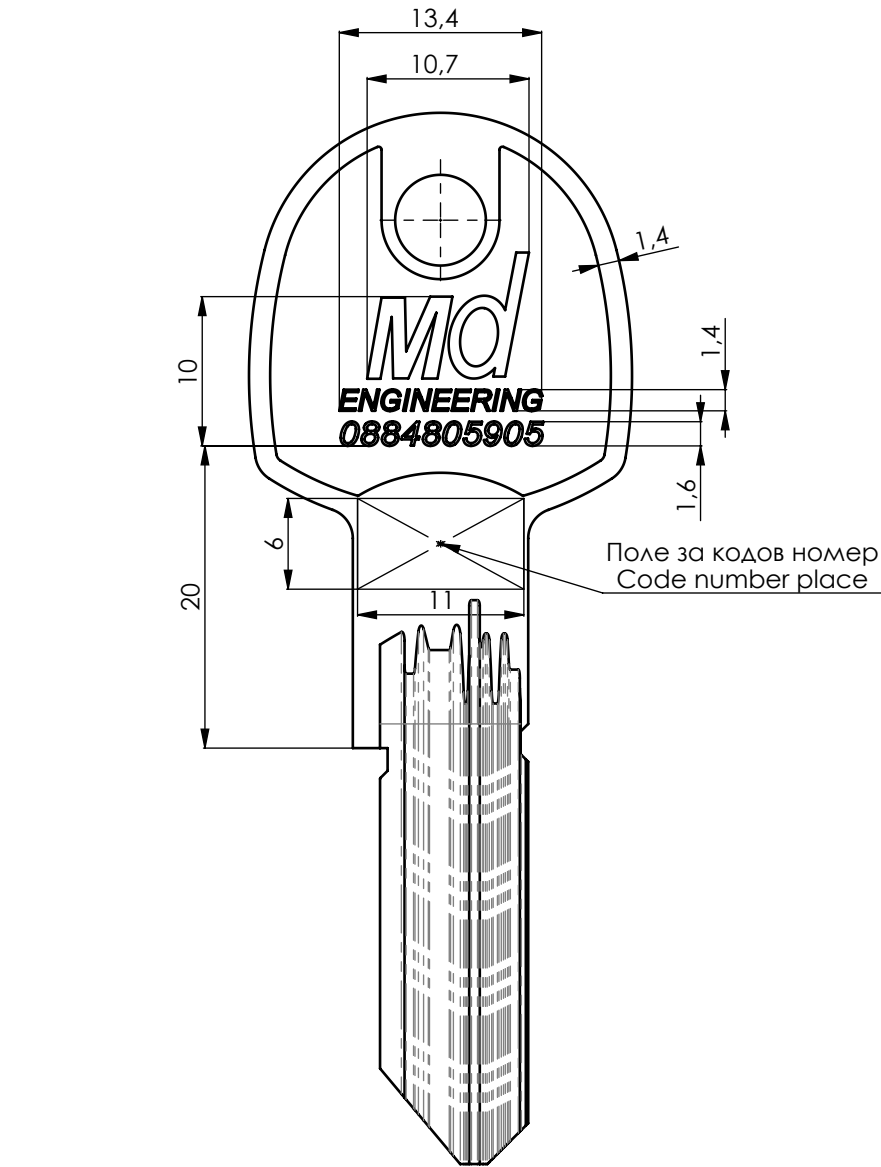


Лазерно гравирание
Laser engraving

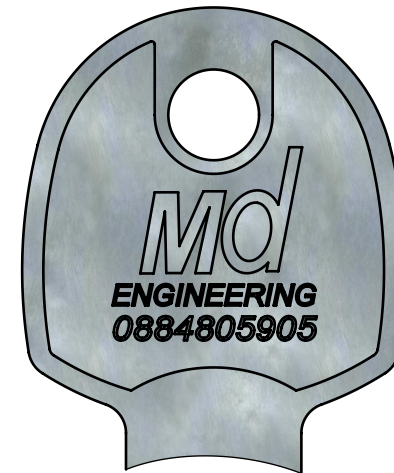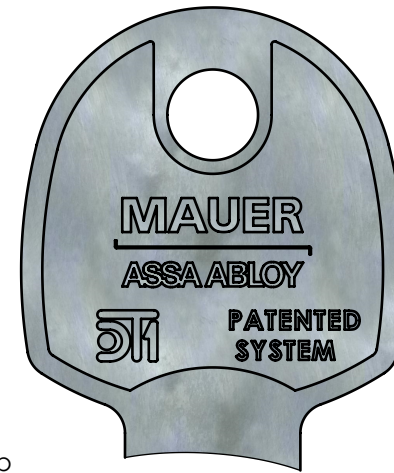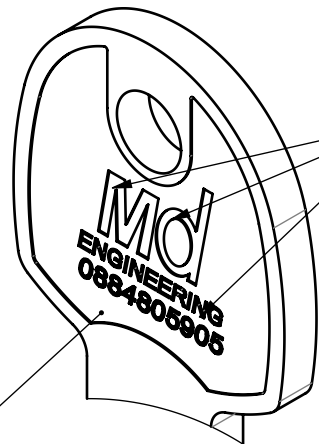

1 : 1

1 : 1

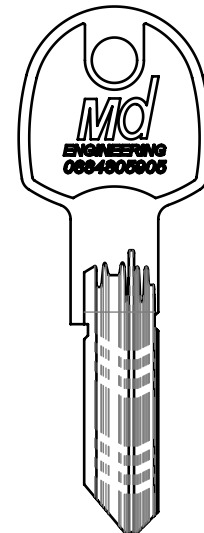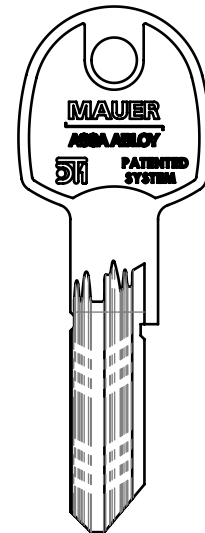

1. Надписите и логото да се щампеловат с височина - 0.1... 0.15 мм;
2. Размерите на буквите и разположение на гравировката съгласно 3D модел.

Разработ. Drawn By	Филчев	30.10.2020	Маса (g) Weight	Обем (mm ³) Volume	Площ (mm ²) Surface area	Материал	Material	
Проверил Checked By			0.02					
Т. контрол Manuf.Approv.			Лист Sheet	Наименование				Title
Утвърдил Eng.Approv.	Белев	30.10.2020	1/1	Гравировка MD engineering				
MAUER ASSA ABLOY			Масшаб Scale	Доп. отклонения General tolerance	Означение	DWG №	Версия Revision	
			2:1	ISO 2768 - fH	SF019-056			
30.10.2020 г. C:\MauerPDM\Parts and Assemblies\Фирмени стандарти и нормативи\СФ 019 Гравировки ключ Клиент 4\SF019-056 Гравировка MD engineering								

D

C

B

A